

ISA-7451AS2S

5MP HD Analog IR Bullet Camera



- 5MP 20fps/4MP real-time image, high resolution, true color
- AHD / TVI / CVI standard and lossless video output
- Up to 1500 TVL resolution
- CMOS progressive scan, perfectly capturing the moving object
- Support OSD menu
- High speed, long distance and real time transmission
- Auto color to B / W at low illumination
- Support ICR switch, true day / night
- 10 ~ 20m IR night view distance
- IP67 ingress protection
- Support COC



Asya Telekomünikasyon ve Netgüvenlik Sistemleri

Merkez: Adres: Mehmet Akif Mahallesi, Öztekin
caddesi, No:18 Asya Plaza Ümraniye / İSTANBUL

Perpa Şube:

Adres: Perpa Ticaret Merkezi B Blok Kat:8, No:908

Okmeydanı / İSTANBUL

Tel: +90(850) 433 27 92

Web site: www.asyatelekom.net

Web site: www.isee.com.tr

Fax: +90 (216) 49970 53


E-mail: info@asyatelekom.net

E-mail: info@isee.com.tr

SPECIFICATIONS

Model	ISA - 7451AS2S
Specifications	
Camera	
Image Sensor	1 / 2.5 "CMOS
Resolution	5MP
Image Size	2560 x 1936
Video Output	AHD / TVI / CVI
Image System	PAL / NTSC
Electronic Shutter	Auto
IR Distance	10 ~ 20 m
Frame Rate	5MP@20fps/4MP@30fps
Min. Illumination	Color: 0.01lux@F1.2, AGC ON; B/W: 0 lux with IR
Lens	3.6 mm
Lens Mount	M12
S / N Ratio	≥52dB (AGC OFF)
Ingress Protection	IP 67
Functions	
Function Control	OSD (COC Control)
Day & Night	ICR
Digital WDR	Yes
Digital NR	Yes, 2D DNR
Global Exposure	Yes
Central Exposure	No
AGC	Yes
Auto White Balance	Yes
BLC	Yes
Front Light Compensation	No
Contrast	Yes
Sharpness	Yes
Smart IR	No
Image Setting	Yes
Defect Correction	Auto
Language	Chinese and English
Angle Adjustment	Pan: 0°~360°; Tilt: 0°~80°; Rotation: 0°~360°
Others	
Power Supply	DC12V (± 15%)
Power Consumption	IR OFF : < 1W; IR ON : < 3W
Working Environment	- 10 °C ~ 40 °C, 10 % ~ 90 % (relative humidity)
Dimensions (mm)	162.1x 74. 8 x 73.8

DIMENSIONS

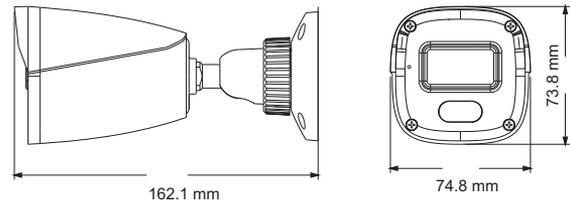

AVAILABLE ACCESSORIES



AVAILABLE MODEL

Available Model	ISA-7451AS2S(D/AR1)
-----------------	---------------------